



SPOTLED DIM Orientable 5,5W 2700-3000-4000K IP44 38° (5040110)

SPOTLED DIM 5,5W 2700-3000-4000K IP65 38° (5040120)










Manuel d'utilisation

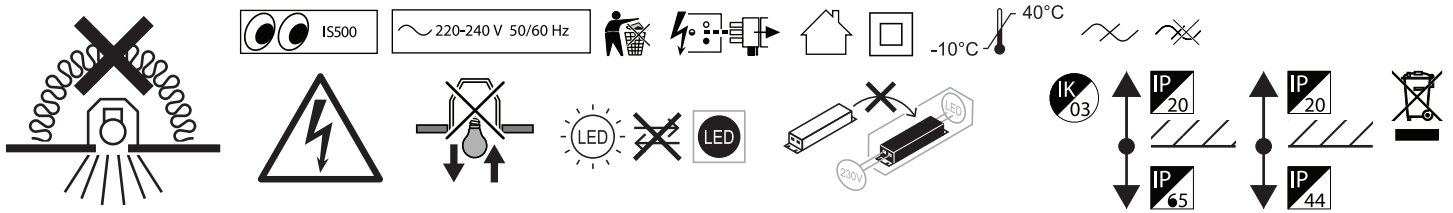


SPOTLED DIM Orientable 5,5W 2700-3000-4000K IP44 38° (5040110)

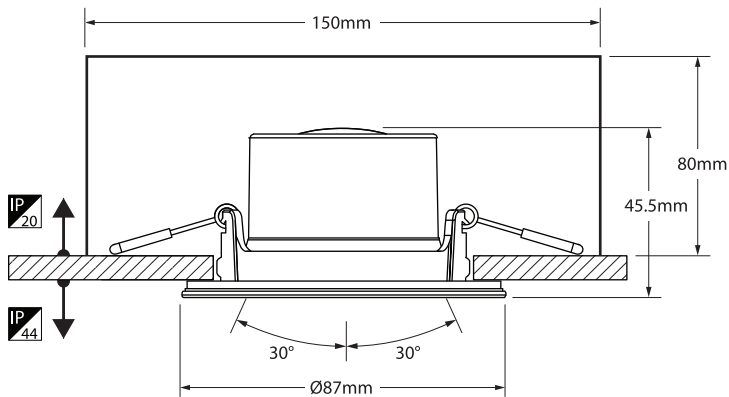

SPOTLED DIM 5,5W 2700-3000-400K IP65 38° (5040120)

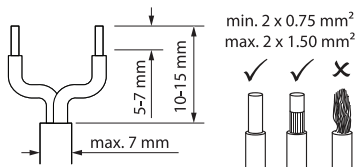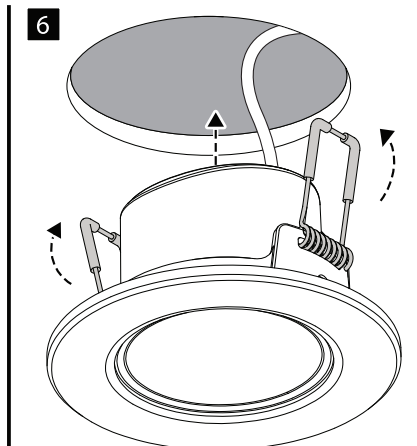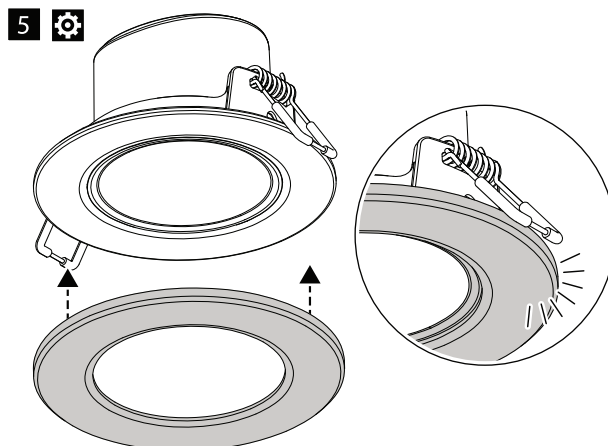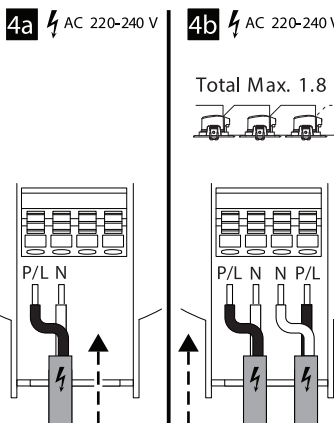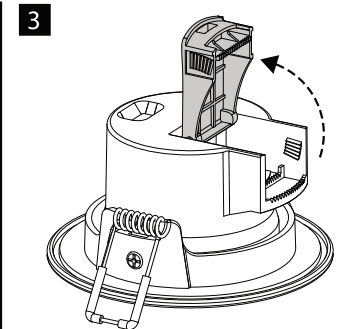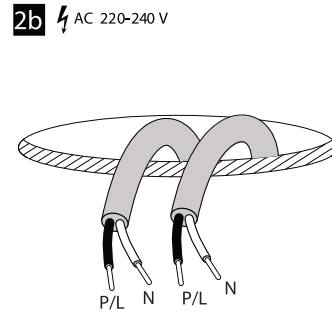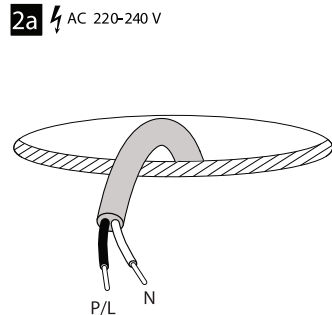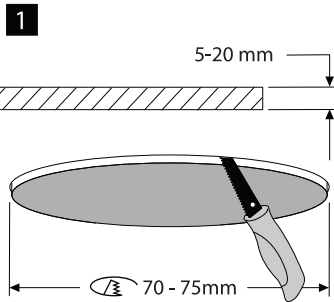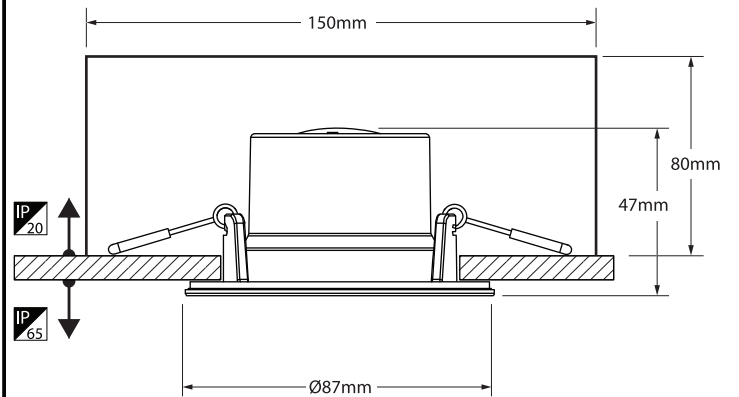

10A C-type	16A C-type
(pcs)	(pcs)
60	100

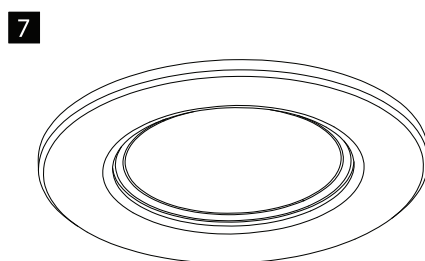

Des collerettes clipsables sont vendues séparément :

- 5040101 - Collerette NOIRE pour Spotled 4,8W et 5,5W
- 5040102 - Collerette SILVER pour Spotled 4,8W et 5,5W
- 5040103 - Collerette CHROME pour Spotled 4,8W et 5,5W
- 5040104 - Collerette INOX BROSSÉ pour Spotled 4,8W et 5,5W